

UV-Meter

UV Meter / LED-UV Meter

System-Features

- PTB-traceable results
- Wide range of sensors
- USB-port, also for battery charging
- LED-UV measuring head

Advantages

- Handy
- Easy to operate
- Long battery life
- Compact sensor design

UV-Meter

The Hönle UV-Meter with application-optimized sensors measures exact data that is **traceable to the German standard PTB (Physikalisch Technische Bundesanstalt)**. Different sensors cover **wavelengths from 230 nm to 550 nm – UVC, UVB, UVA and VIS**. Special LED sensors have been developed for LED-UV systems.

According to its **wide range of interchangeable sensors** UV-Meter is suitable for different manufacturing processes. Its compact surface sensors are only 14 mm high. Also for point sources special sensors are available.

Practical handling

All modes of operation of this handy measuring unit, as well as the measured data, are shown on a clearly arranged display. An intuitive **operational concept by keypad, including short-cut keys** for the most important functions, guarantees highest possible user comfort. Alternatively, measurements can be carried out by **PLC control**. The UV-Meter offers automatic sensor recognition.

The battery can be charged by USB and – thanks to lithium-ion technology – has a very long service life.

Two-channel measuring for different wavelength ranges can be recorded at the same time.

Application ranges

- for UV / LED-UV curing of inks and coatings
- for UV / LED-UV curing of adhesives and potting compounds
- for surface sterilisation via UVC irradiation

Documented measurement data

With the **measured data storage** it is possible to record a test series of intensity and dose. In addition, the minimum,

maximum and average intensity is retained during measuring activity. **The measured results are documented with precise timed sampling.** The **measurements can be evaluated on the PC or with a PLC** via USB connection.

Advantages

- **cost saving** – a single measuring device for all applications
- **measuring accuracy** – the UV-Meter is traceable to PTB standards
- **process reliability** – constant control of UV intensity ensures a consistent quality of UV curing and drying
- **certificated** – reliable calibration with certificate


Types of sensors

surface sensors	
spectrum	maximum intensity
UV-C (230 nm – 285 nm)	2 W/cm ²
UV-B (260 nm – 330 nm)	2 W/cm ²
UV-A (340 nm – 410 nm)	5 W/cm ²
VIS (360 nm – 550 nm)	10 W/cm ²
LED (265 nm – 485 nm)	38 W/cm ²

light guide sensors	
Spektrum	maximum intensity
UV-C (230 nm – 285 nm)	2 W/cm ²
UV-A (340 nm – 410 nm)	20 W/cm ²
LED (265 nm – 485 nm)	30 W/cm ²

quartz rod sensors		
spectrum	maximum intensity	length
UV-C (230 nm – 285 nm)	2 W/cm ²	80, 146 & 260 mm
UV-A (340 nm – 410 nm)	5 W/cm ²	80, 146 & 260 mm

Sensors with lower intensity range are also available.

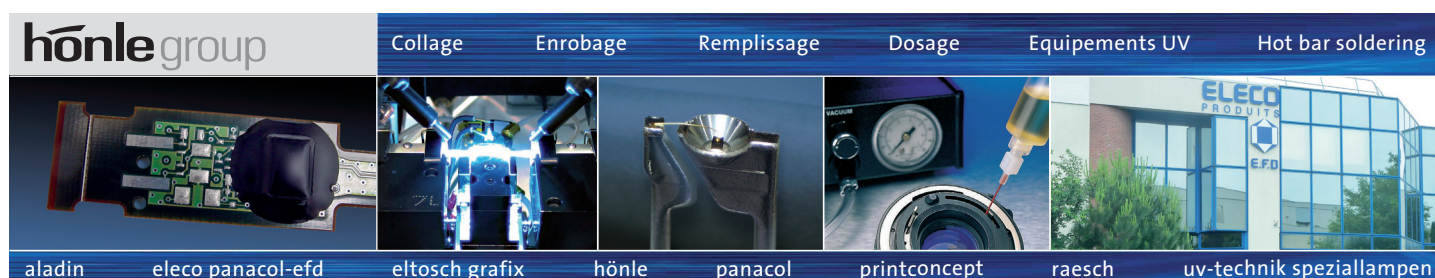

Eleco Panacol-EFD, 125, av Louis Roche, Z.A. des Basses Noels, F-92238 Gennevilliers Cedex, France
Téléphone: +33 /1/ 47 92 41 80, Fax: +33 /1/ 47 92 22 72. www.eleco-panacol.fr

Toutes les données techniques d'utilisation des produits dépendent des applications spécifiques et peuvent différer des informations de cette brochure. Nous nous réservons le droit de modifier nos données techniques.
Copyright, Eleco Panacol, Révision 01/20.