

bluepoint 2 easycure

UV point source

System-Features

- Adjustable lamp output
- Interface to PLC
- Ease of use

Advantages


- Economical
- Long lamp life
- Low cost of maintenance
- Low production cost
- Good price/performance ratio

bluepoint 2 easycure

bluepoint 2 easycure is a **point source** for all applications that need a high degree of UV intensity. Due to its **high intensity shortest cycle times** can be realized.

The typical **lamp life is approx. 2.500 hours**.

A slide out module at the front panel of the housing ensures an **easy replacement of the lamp**. A user-friendly operation is possible through a touch-sensitive keypad.

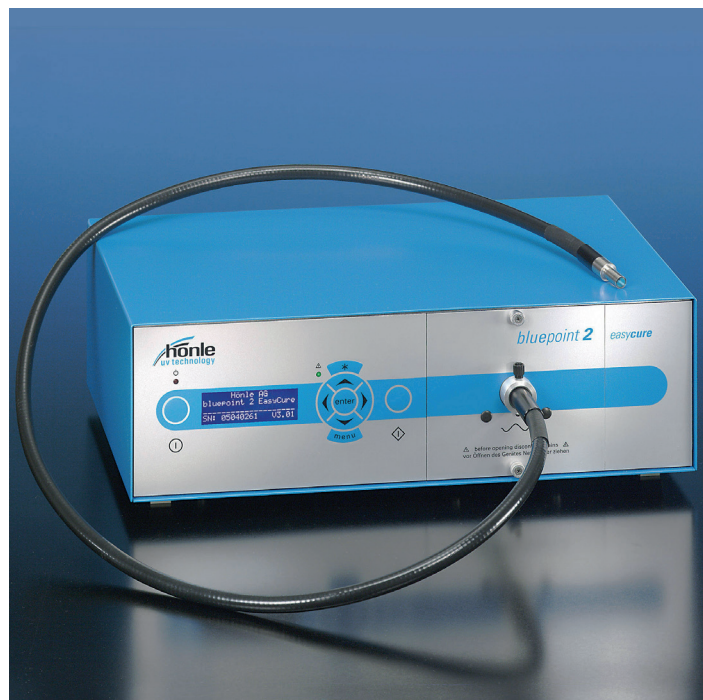

Applications

bluepoint point sources are suitable for a large range of applications:

- Bonding, fixing or potting of components in the electronic, optical and medical-technical industry
- Fluorescent excitation for material testing; also suitable for automatic image processing
- High-intensity UV irradiation for chemical, biological and pharmaceutical purposes

Lamp / shutter control

The exposure time can be selected between 0.1 and 999.9 seconds. Alternatively, it is possible to enter the requested dose and bluepoint 2 easycure calculates automatically the exposure time needed.

The display shows the values in mW/cm^2 and alternatively in mJ/cm^2 or in J/cm^2 . Furthermore, the **electrical lamp output can be adjusted to 60% or 100%**. The unit memorizes operating hours and lamp running hours.


Calibration

Calibration can be carried out automatically with a Höpfe UV Meter or with manual input.

Interfaces

Bluepoint 2 easycure has the following interfaces:

- PLC inputs: lamp on, shutter open, dispensing, adjustable lamp output to 60% or 100%
- PLC outputs: unit switched on, UV ready, error, shutter open and a variable programmable output
- Dry relay contact with selectable function for additional signals (shutter closed, warning, UV on, etc.)
- RS 232 interface for software update for operating software

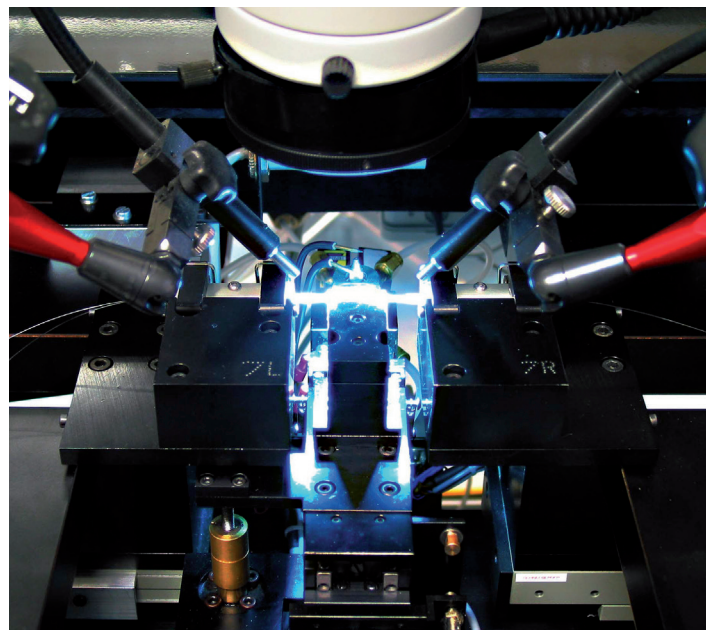

Additional features

All parameter settings can be memorized on 6 storage locations and loaded when needed. The current parameter settings are maintained even after switching off the mains supply.

The unit disposes of extensive error and warning messages. With a keyboard interlock, it is possible to avoid unintentional modifications of parameters. Furthermore, bluepoint 2 easycure has a standby function when the lamp is switched off. Language of menu texts can be chosen between German, English, French and Italian.

Light guides


The following light guides are available:

- Single light guide with the diameters 3 mm, 5 mm and 8 mm
- Double, triple and quadruple light guides with a diameter of the single arms of 3 mm each
- Standard lengths of 1 m and 1.5 m
- Differing lengths on request
- Glas fiber optic

Technical data bluepoint 2 easycure

max. UVA-Intensity *)	>5.000mW/cm ²
Typical lamp life	approx. 2.500 hours (50% of the start intensity)
Timer setting range	0,1 – 999,9 sec
Metal halide lamp	250 W
Mains supply	230 V, 50 Hz
Input current max.	2,5 A (start 4,2 A)
Power rating	650 VA (start 900 VA)
Dimensions (H x W x D)	155 x 450 x 310 mm
Weight	ca. 11,8 kg

*) measured with a Hönle UV Meter and test light guide

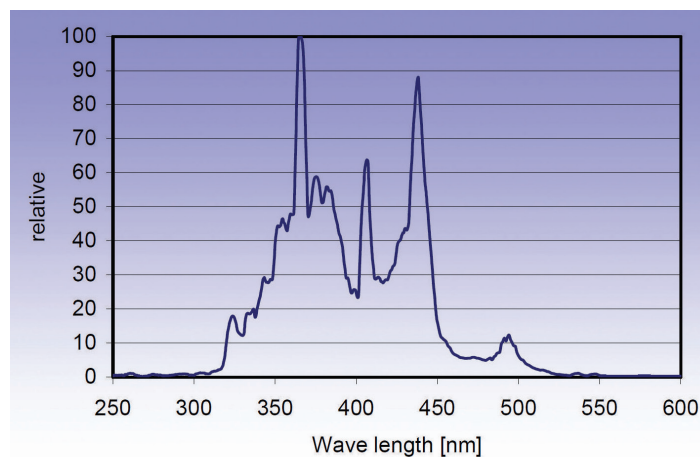

Spectrum bluepoint 2 easycure with coated quartz guide 320 nm - 500 nm

hönle group		Collage	Enrobage	Remplissage	Dosage	Equipements UV	Hot bar soldering
aladin	eleco panacol-efd	eltosch grafix	hönle	panacol	printconcept	raesch	uv-technik speziallampen



Eleco Panacol-EFD, 125, av Louis Roche, Z.A. des Basses Noels, F-92238 Gennevilliers Cedex, France
Téléphone: +33 /1/ 47 92 41 80, Fax: +33 /1/ 47 92 22 72. www.eleco-panacol.fr

Toutes les données techniques d'utilisation des produits dépendent des applications spécifiques et peuvent différer des informations de cette brochure. Nous nous réservons le droit de modifier nos données techniques.
Copyright, Eleco Panacol, Révision 07/19.